



# **TRUE SEAL** **YOUR PASSIVE FIRE SPECIALISTS**

Passive fire protection involves many different products and systems to protect assets and contain a fire in a building.

Specific products are designed to maintain the structural capabilities for the safe evacuation and access of fire services to contain the fire.

These products are designed with BCA/NCC standards and conform to specified FRL (Fire Resistance Level) to AS 1530.4

**Please contact TRUE SEAL for all your passive fire enquiries**

TRUE SEAL aims to provide a wide range of quality tested passive fire protection products & systems. Our range of quality cost effective products together with our ongoing service ensures peace of mind for all passive fire aspects of the building and construction industry.


Please contact us to discuss your current or next project's specification requiring passive fire compliance.


**TRUE SEAL - YOUR SPECIALIST PASSIVE FIRE CONTRACTOR**  
with a combined 140 years of industry and building expertise.


---

For all quotes and enquiries please contact us : (03) 8590 8872


---


PROMAT	CODE	PRODUCT
	PTSC 40	40mm RETRO FIT COLLAR
	PTSC 50	50mm RETRO FIT COLLAR
	PTSC 65	65mm RETRO FIT COLLAR
	PTSC 80	80mm RETRO FIT COLLAR
	PTSC 100	100mm RETRO FIT COLLAR
	PTSC 150	150mm RETRO FIT COLLAR
	LARGER SIZES CONTACT OFFICE	


SNAP	CODE	PRODUCT
	STSC 32	32mm RETRO FIT COLLAR
	STSC 40	40mm RETRO FIT COLLAR
	STSC 50	50mm RETRO FIT COLLAR
	STSC 65	65mm RETRO FIT COLLAR
	STSC 80	80mm RETRO FIT COLLAR
	STSC 100	100mm RETRO FIT COLLAR
	LARGER SIZES CONTACT OFFICE	

UNI COLLAR	CODE
	TSUC 2250mm LONG STRIP INCLUDING FIXINGS
	PRODUCT DESIGNED TO BE CUT INTO REQUIRED PIPE DIMENSIONS. REFERENCE GUIDE IS INCLUDED FOR EASY COLLAR SIZE REQUIRED.




FIRE RATED PILLOWS	CODE	SIZE	QTY PER PACK
	TSFP	SMALL 100 X 250 X 30	30
		MEDIUM 200 X 250 X 40	20
		LARGE 300 X 250 X 40	15
		EXTRA LARGE 600 X 250 X 40	10
FIRE PILLOWS ARE A CLOTH BAG FILLED WITH HIGH DENSITY FIRE RESISTANT GRANULATED MATERIAL			

SEALANT 600mm & 300mm	CODE	600ml & 300ml ACRYLIC
	TSM-300	300ml CARTRIDGE FIRE RATED SEALANT (INTERIOR USE)
	TSM-600	600ml SAUSAGE FIRE RATED SEALANT (INTERIOR USE)
	PRODUCT AVAILABLE IN BOTH WHITE & GREY	
	CODE	600ml SAUSAGE POLYURETHANE
	TSPM-600	600ml SAUSAGE FIRE RATED SEALANT (EXTERIOR USE)

FIRE RATED MORTAR	CODE
	TSFM-20
	20Kg DRY POWDER FIRE RATED HYDRAULIC CEMENT
	AS 1530.4 HAS A 4 HOUR FRL WITH A 105mm THICKNESS

IBS BACKING ROD	CODE	SIZES	PRODUCT
	TSIBS 16	16mm	IBS BACKING ROD IS A FLEXIBLE FOAM STRIP AVAILABLE IN NOMINATED SIZES  USED FOR SEALING JOINTS AND GAPS IN FIRE RATED SYSTEMS  TESTED TO AS1530.4 UP TO 240 MINUTES FRL.  FOR SYSTEM AND APPLICATION COMPLIANCE PLEASE CONTACT TRUE SEAL.
	TSIBS 22	22mm	
	TSIBS 29	29mm	
	TSIBS 38	38mm	
	TSIBS 50-20	50mm x 20mm	

PENOWRAP	CODE
	TCPW 10m LONG x 300mm WIDE x 12mm THICK
	TBA FIREFLY PENOWRAP IS DESIGNED TO MAINTAIN THE REQUIRED FRL TO VARIOUS WALL/FLOOR/CEILING AND OTHER VARIOUS FIRE PENETRATIONS. CONTACT US FOR COMPLIANCE INFORMATION

## FIRE DAMPER



A FULL RANGE OF KILARGO  
FIRE RATED DAMPERS  
MEETING COMPLIANCE TO  
ALL FRL SPECIFICATIONS.

## PROMAT FIRE RATED BOARDS



### CODE

### SIZE

TSP100

2500 x 1200 SHEETS (15mm and 20mm)  
WALL & CEILING APPLICATIONS

TSP250

2500 x 1200 SHEETS (15mm, 20mm & 30mm)  
STEEL PROTECTION

TSPL

2500 x 1200 SHEETS (15mm, 20mm & 30mm)  
HIGH DENSITY FIRE SPECIFICATIONS

TSL500

2500 x 1200 SHEETS (52mm)  
DUCT ENCLOSURE & SELF SUPPORTING DUCT SYSTEMS

A FULL RANGE OF PROMAT FIRE RATED BOARD SYSTEMS  
FOR WALL, CEILING AND STEEL PROTECTION

## FIRE RATED ACCESS PANELS

### CODE

### PRODUCT

### CODE

### PRODUCT

### CODE

### PRODUCT

TSWP


FIRE RATED WALL PANEL

TSSP

FIRE RATED SHAFT PANEL

TSCP

FIRE RATED CEILING PANEL

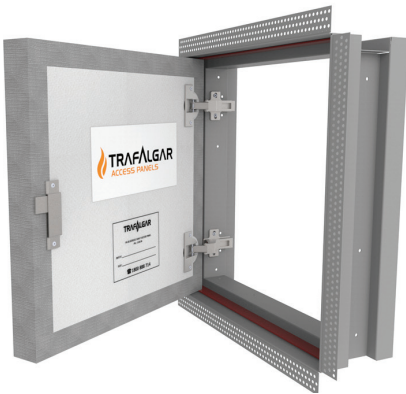

OUR FULL RANGE OF FIRE RATED ACCESS PANELS,  
CUSTOM SIZING AS SPECIFIED PRODUCT AVAILABLE WITH **CONCEALED HINGE**, **ALLEN KEY** LOCKING,  
AND IN BOTH **SET BEAD** (WET WALL FRAMING) AND **FLANGED FRAME** (PICTURE FRAME)  
ALL FIRE RATED ACCESS PANELS ARE TESTED TO AS 1530.4 AND HAVE ACHIEVED UP TO 2HR FRL  
PLEASE CONTACT TRUE SEAL TECHNICAL & QUALITY FOR ALL COMPLIANCE REQUIREMENTS.